

LUMENSOURCE


FOUNTAIN LED 5 SERIES

The Fountain LED 5 series uses a patented double layer Die-cast aluminum with brass heat sink inserts. The optional accessories include recessed box or quick screw-in bracket provides high performance, energy saving, and long lasting light output underwater lighting needs.



SPECIFICATIONS

Wattage	5W
Voltage	12V DC
Average Lifetime	> 50,000 hrs
Colors	Warm White (3,000K) Cool White (5,000K)
Luminous Flux	210 lm (WW); 250 lm (CW)
Beam Angle	30 degrees
Dimensions	2" dia / 2.5" length
Dimmability	Magnetic Low Voltage (CW & WW)
LED	5

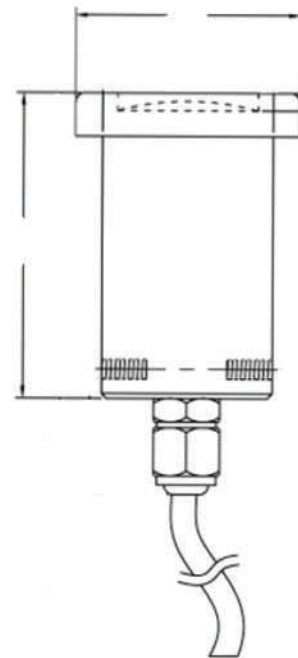

ORDERING INFO

- FUL5-X
 - C – Cool White
 - W – Warm White

